

Modular Construction Walk-In Temperature/Humidity Chambers, WM-SERIES

Russells modular construction test chambers give the maximum flexibility in both chamber size and performance for your most demanding test requirements. Russells WM-Series chambers allow manufacturers to simulate how their products will perform in temperature and humidity conditions. These chambers can be manufactured as Dynamometer rooms also.



Russells WM-Series chambers can provide the following combination of controlled testing environments:

- Steady state temperature and temperature/humidity tests
- Moderate temp./humidity cycling tests ($9^{\circ}\text{F}/5^{\circ}\text{C}/\text{min.}$)
- Moderate temperature heat aging ($185^{\circ}\text{F}/85^{\circ}\text{C}$)

Chamber Features:


- Economical cost
- Ease of move in and install
- Engineered cooling modules
- Wide range of size and performance



Performance:

- Temperature range for single stage refrigeration: $-13^{\circ}\text{F}/25^{\circ}\text{C}$ to $185^{\circ}\text{F}/85^{\circ}\text{C}$
- Temperature range for cascade refrigeration: $-100^{\circ}\text{F}/-73^{\circ}\text{C}$ to $185^{\circ}\text{F}/85^{\circ}\text{C}$
- Humidity Range: 10% to 95% RH within the bounds of a $158^{\circ}\text{F}/70^{\circ}\text{C}$ max. dry bulb and a $40^{\circ}\text{F}/4^{\circ}\text{C}$ min. dewpoint.

Russells WM-Series chambers are available in any imaginable size. A Russells application engineer can assist you in selecting the chamber configuration and size that is most economical for your testing needs. Let Russells give you the competitive edge!

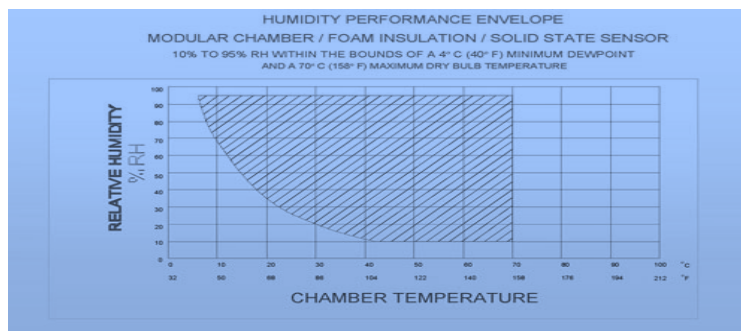

Modular Construction Walk-In Temperature/Humidity Chambers, WM-SERIES

Standard Features:

- Modular chamber construction with pre-fabricated wall panels produced with a urethane foam insulation core.
- Wall insulation, 13k factor.
- Available wall thickness: 4" (100mm) or 5" (125mm).
- Available wall panel finishes: galvanized steel, steel w/baked enamel, embossed aluminum, stainless steel.
- Floor loading to 600 lbs/ft² (2900 kg/m²) evenly distributed.
- Available door styles: bifold, full swing, horizontal sliding.
- Removable access panels for serviceability on ECM units.

Cooling:

- Low or zero ozone depletion refrigerants.
- Engineered cooling module. (rear plenum)
- Energy saving refrigeration bypass capacity control.
- Low stage desuperheater.
- Oil pressure switches.
- Compressor suction and discharge pressure switches.
- Water cooled condenser.
- Vapor tank and condenser ASME certified.
- Compressor overload protection.
- High stage compressor crankcase heater.
- Compressor head fans.
- Low stage oil separator.
- All piping joints silfos or silver soldered.
- Stainless steel compressor condensate pans.

Electrical:

- All wiring meets NEC standards.
- 120 volt control circuit transformer.
- Fully enclosed electrical panel.
- All circuits fused or circuit breaker protected.
- Full system function switches w/ system status pilot lights.
- Incandescent interior lighting.
- All wiring numbered or color coded.
- High Temperature limit safety.
- Master heating circuit contactor.
- Air circulator/heater interlock
- Balanced load on 3 phase power.

Optional Accessories:

- Through-wall access ports w/foam plugs.
- Viewing windows.
- Refrigeration gauges.
- Refrigeration sound deadening package.
- Remote refrigeration systems.
- LN2 boost cooling.
- Air cooled condenser.
- Humidity water demineralizer.
- Dry air purge system.
- Desiccant dehumidifier.
- Personnel entrance doors.
- Ante rooms.
- Entry ramp.
- Running timer meter.
- System message display.
- Electrical disconnect switch.
- Explosion proof electrical system.
- Floor load spreader plate or tracks.
- Floor screeds for attachment of "floorless" chamber to existing building floor.

Optional Instrumentation:

- Microprocessor temperature/humidity programmer controller.
- Solid state humidity sensor on humidity models.
- Product safeguard redundant over/under temperature limit.
- Circular or electronic chart recorders.
- Computer communications, networking, data-logging software.
- Free standing remote instrument console.